


Impact Sprinklers


AQ-20 / AQ-20CS

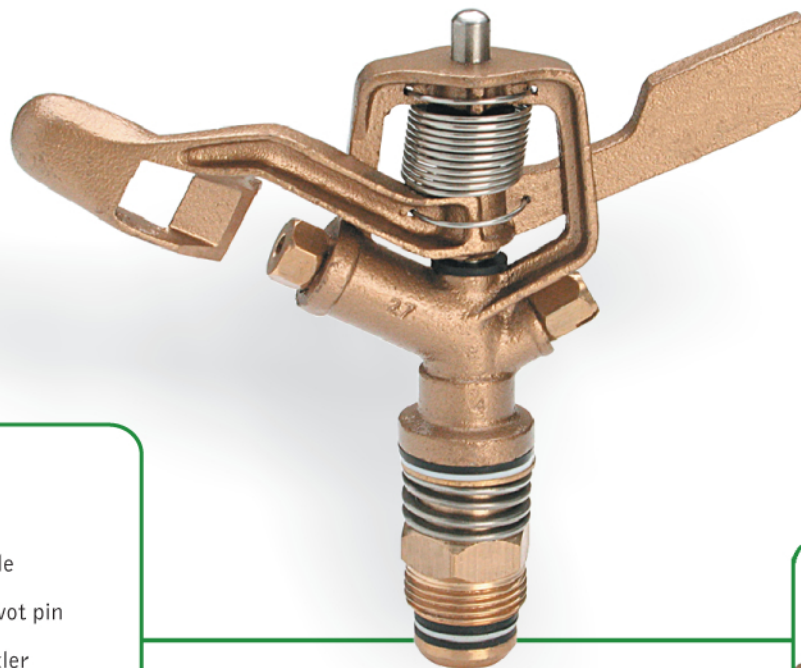

Features

- 3/4" BSP/NPT Male Threads
- Bronze Body & Arm
- Brass Bearing Sleeve & Nipple
- Stainless steel springs and Pivot pin
- AQ-20 Extra Strength Sprinkler
- AQ-20CS Regular Sprinkler

Performance Graph

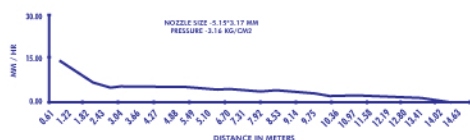

Performance Chart

*STANDARD NOZZLE

Nozzle Size (mm)	Pressure (Bar)	Radius (meters)	Discharge (lpm)
4.36x3.17	2.11	11.50	17.90
	2.46	13.00	23.50
	2.81	13.50	29.40
	3.16	14.00	32.80
	3.52	14.50	37.90
4.76x3.17	2.11	12.50	29.60
	2.46	13.50	32.30
	2.81	15.00	35.50
	3.16	15.50	40.20
	3.52	16.00	43.20
*5.15x3.17	2.11	13.50	34.10
	2.46	14.50	36.80
	2.81	16.00	40.70
	3.16	16.50	43.20
	3.52	17.00	45.20
5.55x3.17	2.11	14.50	37.30
	2.46	16.00	41.40
	2.81	16.50	45.20
	3.16	17.50	48.20
	3.52	17.75	50.50
	3.86	18.00	52.60

The Performance is based on ideal conditions of temperature, wind velocity and humidity.

