

SERIE 300



CARATTERISTICHE TECNICHE
 TECHNICAL CHARACTERISTICS
 TECHNISCHE ANGABEN
 CARACTÉRISTIQUES TECHNIQUES
 CARACTERÍSTICAS TÉCNICAS
 CARACTERÍSTICAS TÉCNICAS




1907/2006
REACH

2011/65/CE
RoHS

PED
2014/68/UE

SILICON
FREE

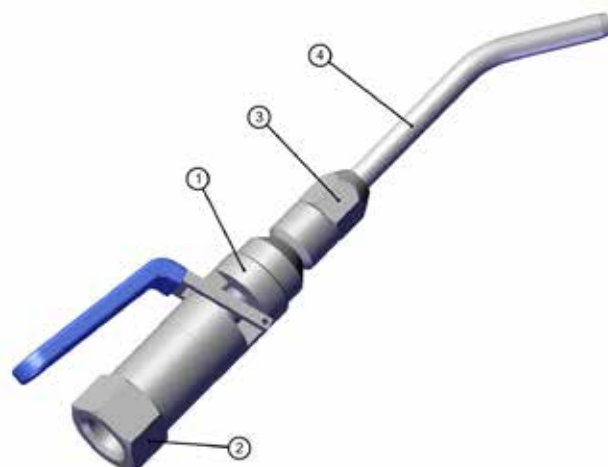

Materiali e Componenti	IT	Component Parts and Materials	GB	Komponenten und Materialien	DE
1 Corpo centrale in Ottone nichelato		1 Nickel-plated Brass Body		1 Körper Messing vernickelt	
2 Attacco terminale in Ottone nichelato		2 Nickel-plated Brass Back Connection		2 Einschraubkörper Messing vernickelt	
3 Dado di serraggio in Ottone nichelato		3 Nickel-plated Brass Locking Nut		3 Sicherungsmutter Messing vernickelt	
4 Ugello di soffiaggio in acciaio Inox AISI 304		4 Stainless Steel AISI 304 Nozzle		4 Blasdüsenrohr Edelstahl AISI 304	
Matériaux et Composants	FR	Materiales y Componentes	ES	Materiais e Componentes	PT
1 Corps: laiton nickelé		1 Cuerpo en latón niquelado		1 Corpo em latão niquelado	
2 Corps: laiton nickelé		2 Conexión terminal en latón niquelado		2 Conexão terminal em latão niquelado	
3 Ecrou: laiton nickelé		3 Tuerca de bloqueo en latón niquelado		3 Porca de travamento em latão niquelado	
4 Embout: acier inoxydable AISI 304		4 Boquilla de soplado en acero AISI 304		4 Boquilla de soplado em acero AISI 304	

301

PISTOLA DI SOFFIAGGIO CON TUBO INOX


BLOWGUN WITH STAINLESS STEEL NOZZLE

BLASPISTOLE MIT EDELSTAHL ROHR

SOUFFLETTE AVEC EMBOUT ACIER INOXYDABLE

PISTOLA DE SOPLADO CON TUBO ACERO INOXIDABLE

PISTOLA DE AR COM BICO DE AÇO INOXIDÁVEL

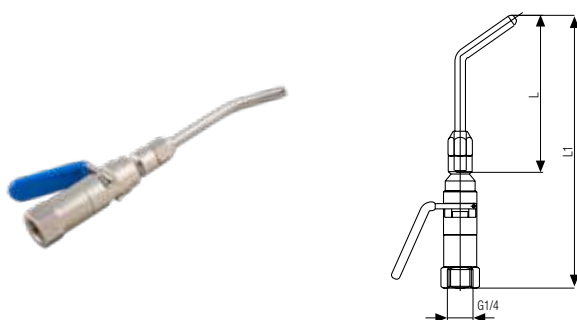

Code	L	L1	Pack.
00301 00 001	90	163	10
00301 00 002	200	273	1
00301 00 003	290	363	1
		min	max
 Temperature	- 10 °C		+ 80 °C
 Pressure	10 bar (1.0 MPa)		
	450 NI/min @ 6 bar - 616 NI/min @ 8 bar		
	LAeq 88 dBA @ 6 bar		
	LAeq 89 dBA @ 8 bar		
	Forza su maniglietta - Force on handle Kraft am Griff - Force sur la poignée Fuerza en el mango - Força no punho	23,5 N @ 6 bar	
	Forza di soffiaggio - Blowing force Kraft der Schlag - Force de soufflage Fuerza que sopla - Força de sopra	4,6 N @ 6 bar	
	2003/10/CE	Max 85 dBA	3 hr @ 6 bar 3 hr @ 8 bar
	OSHA 1910.95 (b)	Max 90 dB 8 hr	