


# Bande de montage acier bords droits (gs)

(K 05 05)



fixation de tuyaux et de conduits d'air

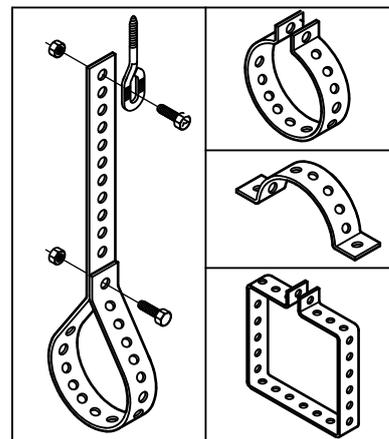

## Avantages et caractéristiques

- perforation continue
- matière : acier
- traitement de surface : galvanisation sendzimir

Code article	Type	L	b x s (mm)	d1 (mm)	k (mm)	F <sub>a,z</sub> (N)	Cond.1	Cond.2	UC
0830012	5055	10 m	12 x 1,0	5,0	8,0	1 050	10	-	pc.
0830017	5055	10 m	17 x 1,0	7,0	12,0	1 500	10	-	pc.
0831012	5055L	10 m	12 x 0,8	5,0	8,0	840	10	-	pc.
0831017	5055L	10 m	17 x 0,8	7,0	12,0	1 070	10	-	pc.
0831026	5055L	10 m	26 x 1,0	8,5	14,0	2 620	1	10	pc.

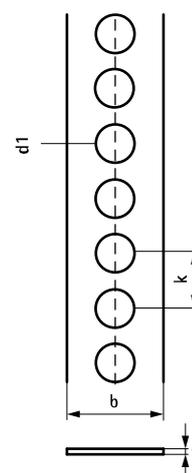

### Complémentaire

Œillets de suspension  
Goujons à chasser pour attaches de sol  
Vis à trou oblong

### Complémentaire

Boulons à trou oblong  
Crochet HK