


- Conditionnement : 10



	H	L	l	E	e	Ø axe	Ø noeud	Ø d
110 x 50	110	50	14	28	3,5	6	13	4,5
110 x 55	110	55	14	28	3,5	6	13	4,5
110 x 60	110	60	14	28	3,5	6,5	13,5	4,5
140 x 55	140	55	15	38	3,5	6,5	13,5	4,5
140 x 60	140	60	15	38	3,5	6,5	13,5	4,5
140 x 70	140	70	16	38	4	7,5	15	5,5
160 x 60	160	60	16	43	4	7,5	15	5,5
160 x 70	160	70	17	43	4	7,5	15	5,5
190 x 65	190	65	17	52	4	7,5	15	5,5
190 x 70	190	70	18	52	4	7,5	15	5,5
190 x 80	190	80	19	52	4	7,5	15	5,5

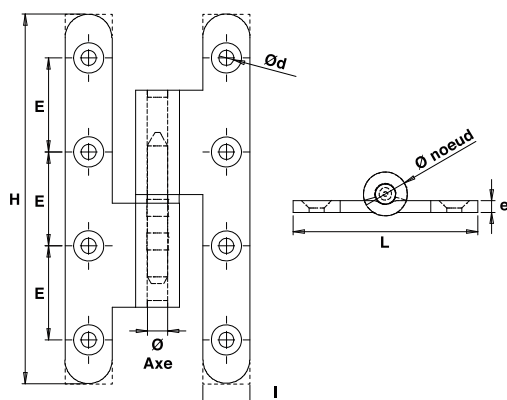

Paumelle droite
Bouts ronds - Zingué blanc



Paumelle droite
Bouts ronds - Epoxy noir

	Sens	110 x 50	110 x 55	110 x 60	140 x 55	140 x 60	140 x 70
BRUT	Droite	FR1105RD0	FR11055RD0	FR1106RD0	FR14055RD0	FR1406RD0	FR1407RD0
	Gauche	FR1105RG0	FR11055RG0	FR1106RG0	FR14055RG0	FR1406RG0	FR1407RG0
Z.BLANC	Droite	FR1105RD1	FR11055RD1	FR1106RD1	FR14055RD1	FR1406RD1	FR1407RD1
	Gauche	FR1105RG1	FR11055RG1	FR1106RG1	FR14055RG1	FR1406RG1	FR1407RG1
EPOXY NOIR 9005 - 30%	Droite	FR1105RDJ	FR11055RDJ	FR1106RDJ	FR14055RDJ	FR1406RDJ	FR1407RDJ
	Gauche	FR1105RGJ	FR11055RGJ	FR1106RGJ	FR14055RGJ	FR1406RGJ	FR1407RGJ

	Sens	160 x 60	160 x 70	190 x 65	190 x 70	190 x 80
BRUT	Droite	FR1606RD0	FR1607RD0	FR19065RD0	FR1907RD0	FR19080RD0
	Gauche	FR1606RG0	FR1607RG0	FR19065RG0	FR1907RG0	FR19080RG0
Z.BLANC	Droite	FR1606RD1	FR1607RD1	FR19065RD1	FR1907RD1	FR19080RD1
	Gauche	FR1606RG1	FR1607RG1	FR19065RG1	FR1907RG1	FR19080RG1
EPOXY NOIR 9005 - 30%	Droite	FR1606RDJ	FR1607RDJ	FR19065RDJ	FR1907RDJ	FR19080RDJ
	Gauche	FR1606RGJ	FR1607RGJ	FR19065RGJ	FR1907RGJ	FR19080RGJ