



Sensys thick door hinge with integrated Silent System

Sensys thick door hinge, door thickness up to 32 mm, with integrated silent system (Sensys 8631i), nickel plated, half overlay, Opening angle 95°, TH-drilling pattern 52 x 5.5 mm, for screwing on (-)

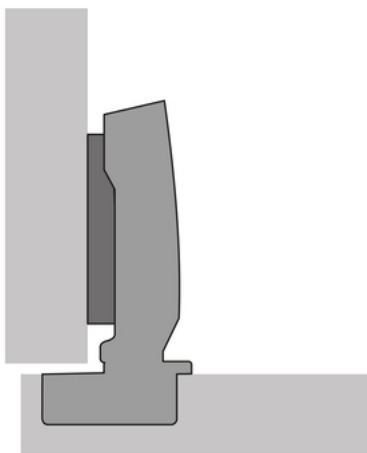

- Sensys thick door hinge, door thickness up to 32 mm
- With integrated Silent System, with self closing feature (Sensys 8631i)
- Quality classification under EN 15570, Level 2
- Opening angle 95°
- For door thickness 15-32 mm
- Door mounting option half overlay (B 3 mm)
- TH - drilling pattern 52 x 5.5 mm
- Cup depth 12.8 mm
- Installation for screwing on (TH 52)
- Integrated overlay adjustment +2 mm / -2 mm
- Integrated depth adjustment +3 mm / -2 mm
- Height adjustment at mounting plate
- steel nickel plated

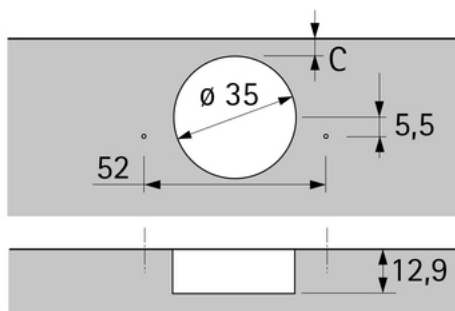

shop.hettich.com/gb_EN/p/9090270

Sensys thick door hinge with integrated Silent System

Article Number 9090270

- **Sensys thick door hinge, door thickness up to 32 mm, with integrated silent system (Sensys 8631i), nickel plated, half overlay, Opening angle 95°, TH-drilling pattern 52 x 5.5 mm, for screwing on (-)**

FEATURE	VALUE
Door mounting option	half overlay
Type of installation	for screwing on
Drilling pattern	TH 52 x 5,5 mm
Design	90° construction
Door type	Thick door, Standard door / wooden door, Wood framed door (profile width from 50 mm), Aluminium framed door (profile width from 50 mm)
User friendly features	with integrated silent system
Opening angle	95
Min. door thickness	15
Max. door thickness	32
Cup version	TH 52
Base	3
Cup diameter	35
Cup depth	12.8
Hinge surface finish	steel nickel plated
Mounting hole	-
Diameter of mounting hole	Centre punch, Predrilled hole 2.5 mm Ø max.
Integrated overlay adjustment	+2 mm / -2 mm
Integrated depth adjustment	+3 mm / -2 mm
Stay closed function	Yes
Finish	nickel plated
Order no.	9090270
PU	200

Safety instructions

	Follow instructions
	Keep away from children
	Warning of pinching and crushing edges. Do not reach into open door gaps or fitting openings.
	Attention shipping packaging! Fittings may fall out if opened carelessly.
	Attention! Only suitable for indoor use and the usual climatic conditions there
	Caution! Ensure a suitable choice of material.
	Warning against incorrect assembly due to the use of incorrect tools.
	Caution! Use adjusting devices with care. Risk of injury due to slipping.