

210

Polypropylene Homopolymer Ball Bib Cock



Via Circonvallazione, 10
13018 Valduggia (VC), Italy
Tel: +39 0163 47891
Fax: +39 0163 47895
www.vironline.com




Polypropylene homopolymer ball bib cock
Threaded M (ISO 228/1) with hose union
One piece body
Brass internal parts and hose union
(quick release plastic hose union available as option up to DN≤20)
Blow-out proof brass stem, with handle or butterfly
TR CU 010 compliant

PN16
Free of CE marking (cat. according to Art. 4.3 Dir. 2014/68/EU)

Working conditions

- Suitable for: water, 0°C to +75°C
- Not suitable for: gases group 1 & 2, liquids group 1 (Dir. 2014/68/UE)

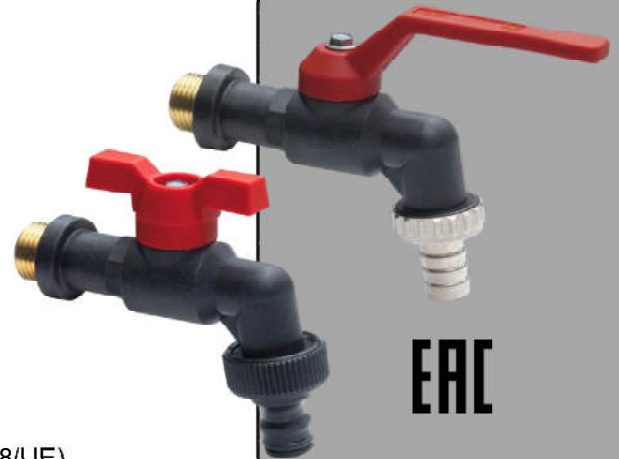

EAC


PARTLIST

N.	Part	Material	Norm
1	Hose union	Nickel pl. Brass ¹	EN12165 CW617N
2	Ring nut	Nickel pl. Brass ¹	EN12165 CW617N
3	Threaded end	Brass	EN12165 CW617N
4	Body	Polypr. homopolymer ²	-
5	Ball	Chromium pl. brass	EN12164 CW617N
6	Stem	Brass	EN12164 CW617N
7	O-ring	NBR	-
8	Ring	Brass	EN12165 CW617N
9	Seat	PTFE	-
10	Screw	Dacromet steel	EN10025 Fe42
11	Handle	PA6 Polyamide ³	-
11 _{alt}	Butterfly	PA6 Polyamide ²	-

¹With NBR gasket and polypropylene aerator for brass version; in one piece with NBR gasket and EPDM external O-ring for version with (polyamide) plastic hose union

²30% glass fiber reinforced

³50% glass fiber reinforced

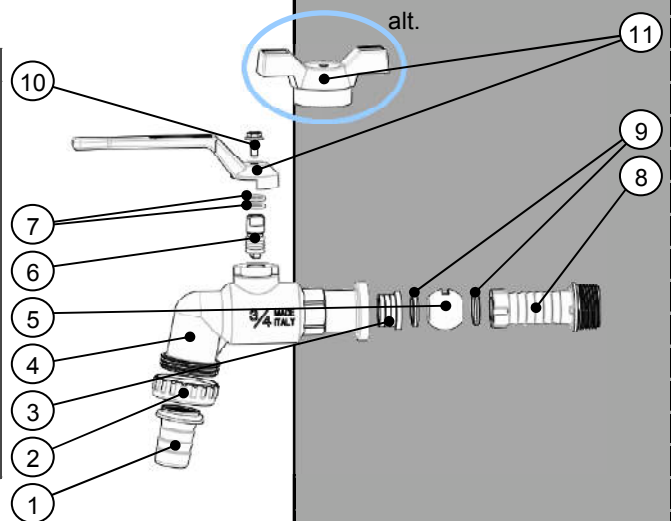


DIMENSIONS

DN	G	E ¹	AA [mm]	AB [mm]	D [mm]	P [mm]	HA [mm]	HB [mm]	L [mm]	HF [mm]	F [mm]	Weight [g]
010	3/8"	1/2"	105 / 108 ²	56	11,8	10	55 / 56 ²	47	85	41	61	143 / 129 ²
015	1/2"	1/2"	105 / 108 ²	56	11,8	10	55 / 56 ²	47	85	41	61	147 / 133 ²
020	3/4"	3/4"	132 / 133 ²	75	13,0	15	77 / 74 ²	55	102	50	65	246 / 220 ²
025	1"	1"	158	86	16,0	20	80	59	102	54	65	379

¹Only for version with brass hose union

²Version with brass hose union / versione with plastic hose union

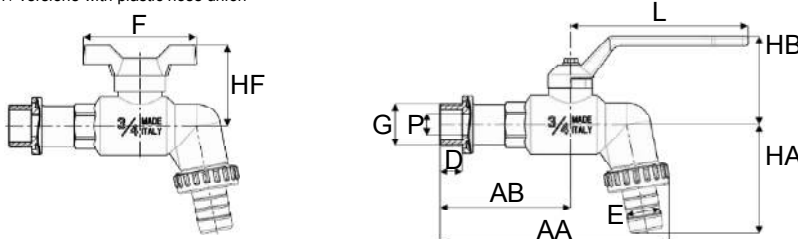

170411