



**Technical and Test Institute
for Construction Prague**
Prosecká 811/76a
190 00 Prague
Czech Republic
eota@tzus.cz



Member of



www.eota.eu

European Technical Assessment

ETA 22/0825
of 07/01/2023

Technical Assessment Body issuing the ETA: Technical and Test Institute
for Construction Prague

Trade name of the construction product

SCELLEMENT UNIV MULTIMAT FIXH

**Product family to which the construction
product belongs**

Product area code: 33
Bonded injection type anchor for use
in uncracked concrete

Manufacturer

SOGEDESCA
10 rue Général Plessier
69002 Lyon – France

Manufacturing plant

Plant A

**This European Technical Assessment
contains**

14 pages including 11 Annexes which form
an integral part of this assessment

**This European Technical Assessment is
issued in accordance with regulation
(EU) No 305/2011, on the basis of**

EAD 330499-01-0601

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (excepted the confidential Annex(es) referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body - Technical and Test Institute for Construction Prague. Any partial reproduction has to be identified as such.

1. Technical description of the product

The SCHELEMENT UNIV MULTIMAT FIXH for uncracked concrete is a bonded anchor consisting of a cartridge with injection mortar and a steel element. The steel element consists of a commercial threaded rod, a hexagon nut and a washer. The steel elements are made of galvanised steel or stainless steel.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The illustration and the description of the product are given in Annex A.

2. Specification of the intended use in accordance with the applicable EAD

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed working life of the anchor of 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the products in relation to the expected economically reasonable working life of the works.

3. Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Resistance to steel failure (tension)	See Annex C1
Resistance to combined pull-out and concrete failure	See Annex C1
Resistance to concrete cone failure	See Annex C1
Edge distance to prevent splitting under load	See Annex C1
Robustness	See Annex C1
Maximum setting torque moment	See Annex B4
Minimum edge distance and spacing	See Annex B4
Resistance to steel failure (shear)	See Annex C2
Resistance to pry-out failure	See Annex C2
Resistance to concrete edge failure	See Annex C2
Displacements under short term and long term loading	See Annex C3
Durability of metal parts	See Annex A3

3.2 Hygiene, health and environment (BWR 3)

No performance determined.

3.3 General aspects relating to fitness for use

Durability and serviceability are only ensured if the specifications of intended use according to Annex B 1 are kept.

4. Assessment and verification of constancy of performance (AVCP) system applied with reference to its legal base

According to the Decision 96/582/EC of the European Commission¹ the system of assessment verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) given in the following table apply.

Product	Intended use	Level or class	System
Metal anchors for use in concrete	For fixing and/or supporting to concrete, structural elements (which contributes to the stability of the works) or heavy units.	-	1

¹ Official Journal of the European Communities L 254 of 08.10.1996

5. Technical details necessary for the implementation of the AVCP system, as provided in the applicable EAD

The factory production control shall be in accordance with the control plan which is a part of the technical documentation of this European Technical Assessment. The control plan is laid down in the context of the factory production control system operated by the manufacturer and deposited at Technical and Test Institute for Construction Prague.² The results of factory production control shall be recorded and evaluated in accordance with the provisions of the control plan.

Issued in Prague on 07.01.2023


By

Ing. Jiří Studnička, Ph.D.

Head of the Technical Assessment Body

² The control plan is a confidential part of the documentation of the European Technical Assessment, but not published together with the ETA and only handed over to the approved body involved in the procedure of AVCP.

Installation threaded rod

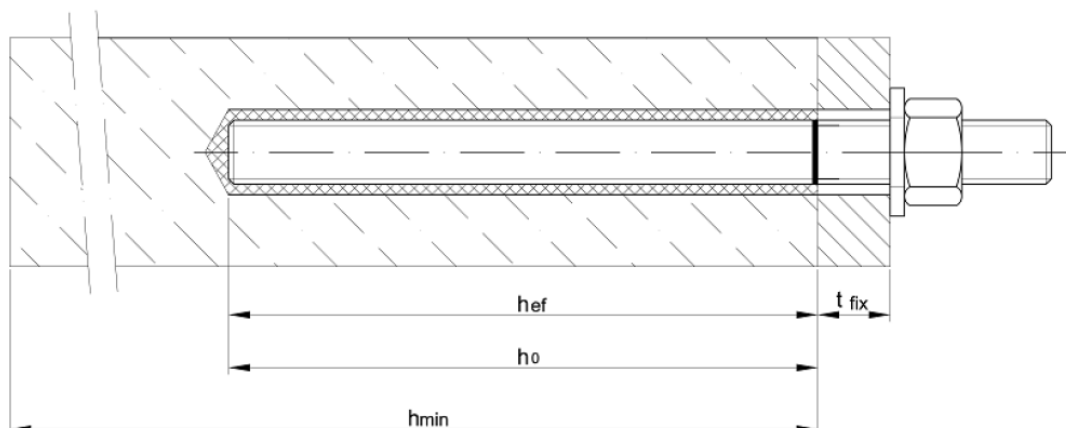

h_{ef} = effective setting depth
 h_0 = bore hole depth
 t_{fix} = thickness of fixture
 h_{min} = thickness of member


SCELLEMENT UNIV MULTIMAT FIXH

Product description
Installed conditions


Annex A 1

Cartridge: SCELLEMENT UNIV MULTIMAT FIXH


150 ml, 280 ml, 300 ml up to 330 ml and 380 ml up to 420 ml cartridge (Type: coaxial)

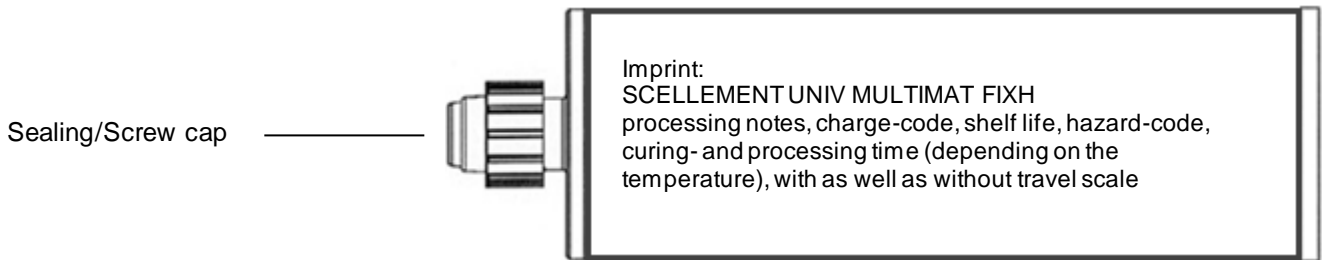


235 ml, 345 ml up to 360 ml and 825 ml cartridge (Type: “side-by-side”)

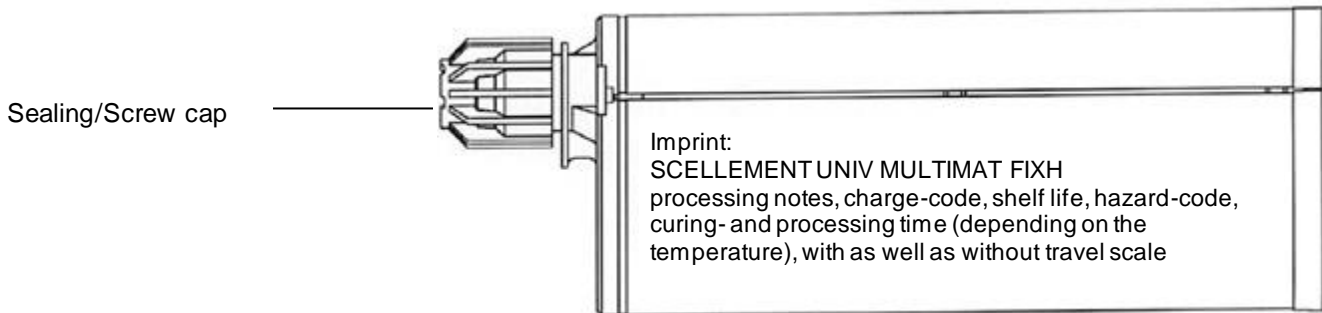

165 ml up to 175 ml and 300 ml cartridge (Type: “foil tube”)

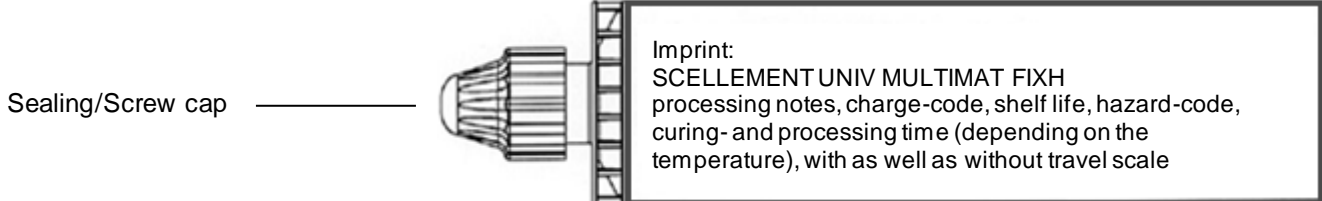

Static mixer

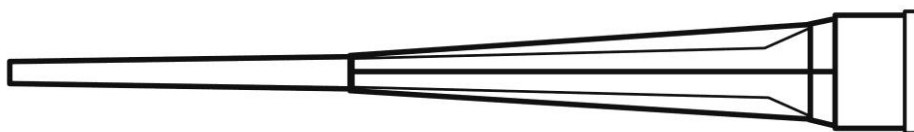


SCELLEMENT UNIV MULTIMAT FIXH

Product description
Injection system

Annex A 2

Threaded rod M8, M10, M12, M16, M20, M24 with washer and hexagon nut

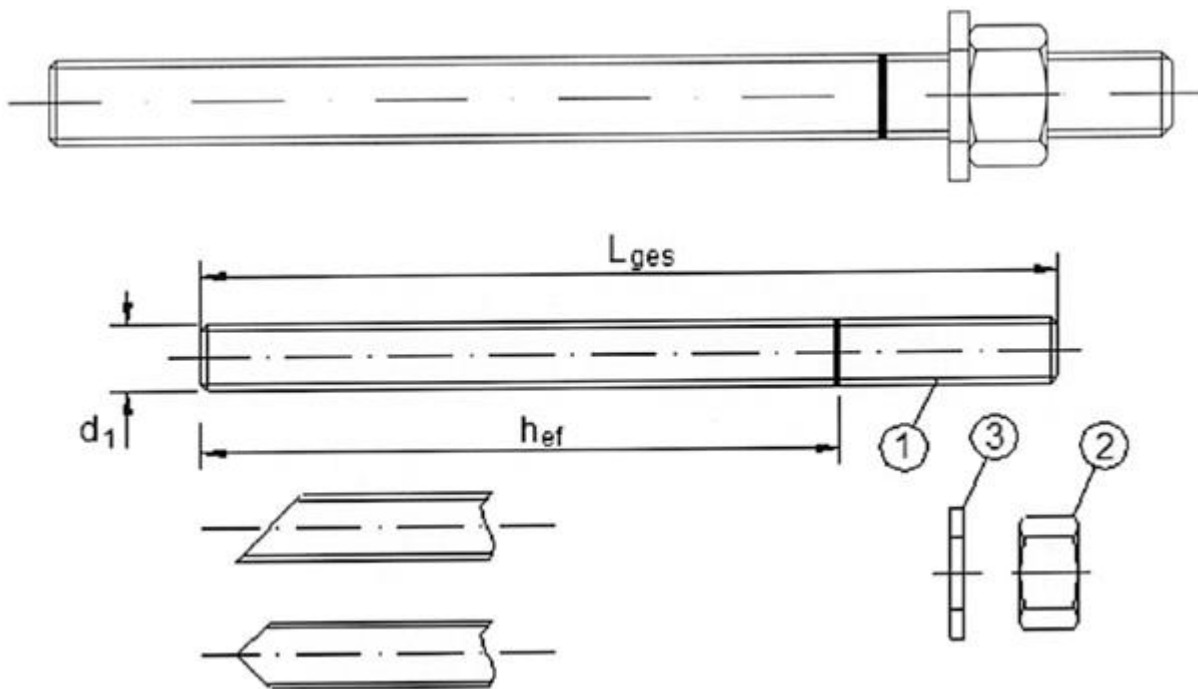

Commercial standard threaded rod with:

- Materials, dimensions and mechanical properties acc. Table A1
- Inspection certificate 3.1 acc. To EN 10204:2004
- Marking of embedment depth

SCELLEMENT UNIV MULTIMAT FIXH	Annex A 3
Product description Threaded rod	

Table A1: Materials

Part	Designation	Material
Steel, zinc plated $\geq 5 \mu\text{m}$ acc. to EN ISO 4042:1999 or Steel, hot-dip galvanized $\geq 40 \mu\text{m}$ acc. to EN ISO 10684:2004+AC:2009		
1	Anchor rod	Steel, EN 10087:1998 or EN 10263:2001 Property class 5.8, 8.8 EN1993-1-8:2005+AC:2009
2	Hexagon nut, EN ISO 4032:2012	Steel acc. to EN10087:1998 or EN10263:2001 Property class 5 (for 5.8 rod) EN ISO 898-2:2012, Property class 8 (for 8.8 rod) EN ISO 898-2:2012
3	Washer, EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000	Steel, zinc plated or hot-dip galvanized
Stainless Steel		
1	Anchor rod	Material A2-70, A4-70, A4-80, EN ISO 3506
2	Hexagon nut, EN ISO 4032:2012	Material according to threaded rod
3	Washer, EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000	Material according to threaded rod
High corrosion resistance steel		
1	Anchor rod	Material 1.4529 / 1,4565, EN 10088-1:2005, Property class 70 EN ISO 3506-1:2009
2	Hexagon nut, EN ISO 4032:2012	Material 1.4529 / 1,4565, EN 10088-1:2005, Property class 70 (for class 70 rod) EN ISO 3506-1:2009
3	Washer, EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000	Material 1.4529 / 1,4565, EN 10088-1:2005,

SCELLEMENT UNIV MULTIMAT FIXH

Product description
Materials

Annex A 4

Specifications of intended use

Anchorage subject to:

- Static and quasi-static loads

Base materials

- Reinforced or unreinforced normal weight concrete according to EN 206:2013.
- Strength classes C20/25 to C50/60 according to EN 206:2013
- Uncracked concrete

Temperature range:

- T1: -40°C to +40°C (max. long. term temperature +24°C and max. short term temperature +40°C)
T2: -40°C to +80°C (max. long. term temperature +50°C and max. short term temperature +80°C)

Use conditions (Environmental conditions)

- (X1) Structures subject to dry internal conditions (zinc coated steel, stainless steel, high corrosion resistance steel).
- (X2) Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel A4, high corrosion resistant steel).
- (X3) Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel).

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Concrete conditions:

- I1 – installation in dry or wet (water saturated) concrete.
- I2 – installation in water-filled (not sea water) and use in service in dry or wet concrete

Design:

- The anchorages are designed in accordance with the EN 1992-4 or EOTA Technical Report TR 055 under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings.

Installation:

- Hole drilling by hammer drill mode.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.

Installation direction:

- D3 – downward and horizontal and upwards (e.g. overhead) installation

SCELLEMENT UNIV MULTIMAT FIXH

Intended use
Specifications

Annex B 1

Table B1: Installation parameters for threaded rod

Anchor Size		M8	M10	M12	M16	M20	M24
Nominal drill hole diameter	d_0 [mm] =	10	12	14	18	22	28
Effective anchorage depth	$h_{ef,min}$ [mm] =	64	80	96	128	160	192
	$h_{ef,max}$ [mm] =	96	120	144	192	240	288
Diameter of clearance hole in the fixture	d_f [mm] ≤	9	12	14	18	22	26
Diameter of steel brush	d_b [mm] ≥	12	14	16	20	26	30
Torque moment	T_{inst} [Nm] ≤	10	20	40	80	150	200
Thickness of fixture	$t_{fix,min}$ [mm] >	0					
	$t_{fix,max}$ [mm] <	1500					
Thickness of member	h_{min} [mm]	$h_{ef} + 30 \text{ mm} \geq 100 \text{ mm}$				$h_{ef} + 2d_0$	
Minimum spacing	s_{min} [mm]	50	60	70	95	120	145
Minimum edge distance	c_{min} [mm]	50	60	70	95	120	145

Steel brush



Table B2: Parameter cleaning and setting tools

Threaded Rod	d_0 Drill bit - ϕ	d_b Brush - ϕ	$d_{b,min}$ min. Brush - ϕ
(mm)	(mm)	(mm)	(mm)
M8	10	12	10.5
M10	12	14	12.5
M12	14	16	14.5
M16	18	20	18.5
M20	22	26	24.5
M24	28	30	28.5



Hand pump (volume 750 ml)
Drill bit diameter (d_0): 10 mm to 20 mm




Recommended compressed air tool (min 6 bar)
Drill bit diameter (d_0): 10 mm to 26 mm

SCELLEMENT UNIV MULTIMAT FIXH


Intended use
Installation parameters
Cleaning and setting tools

Annex B 2

Assembly instructions




- 1 Drill with hammer drill a hole into the base material to the size and embedment depth required by the selected anchor (Table B1). In case of aborted drill hole: the drill hole shall be filled with mortar.




- 2a Starting from the bottom or back of the bore hole, blow the hole clean with compressed air or a hand pump (Annex B 2) a minimum of four times. If the bore hole ground is not reached an extension shall be used.


or



The hand pump can be used for anchor sizes up to bore hole diameter 20 mm. For bore holes larger than 20 mm or deeper 240 mm, compressed air (min. 6 bar) must be used.




- 2b Check brush diameter (Table B2) and attach the brush to a drilling machine or a battery screwdriver. Brush the hole with an appropriate sized wire brush $> d_{b,min}$ (Table B2) a minimum of four times. If the bore hole ground is not reached with the brush, a brush extension shall be used (Table B2).




- 2c Finally blow the hole clean again with compressed air or a hand pump (Annex B 2) a minimum of four times. If the bore hole ground is not reached an extension shall be used.

The hand pump can be used for anchor sizes up to bore hole diameter 20 mm. For bore holes larger than 20 mm or deeper 240 mm, compressed air (min. 6 bar) must be used.


or




After cleaning, the bore hole has to be protected against re-contamination in an appropriate way, until dispensing the mortar in the bore hole. If necessary, the cleaning repeated has to be directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again



- 3 Attach a supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool. For foil tube cartridges, cut off the foil tube clip before use. For every working interruption longer than the recommended working time (Table B3) as well as for new cartridges, a new static-mixer shall be used.



- 4 Prior to inserting the anchor rod into the filled bore hole, the position of the embedment depth shall be marked on the anchor rods




- 5 Prior to dispensing into the anchor hole, squeeze out separately a minimum of three full strokes and discard non-uniformly mixed adhesive components until the mortar shows a consistent grey colour. For foil tube cartridges it must be discarded a minimum of six full strokes.

SCELLEMENT UNIV MULTIMAT FIXH


Intended use
Installation instructions

Annex B 3


Assembly instructions (continuation)




6 Starting from the bottom or back of the cleaned anchor hole fill the hole up to approximately two-thirds with adhesive. Slowly withdraw the static mixing nozzle as the hole fills to avoid creating air pockets. For embedment larger than 190 mm an extension nozzle shall be used. Observe the gel-Working times given in Table B3.




7 Push the threaded rod into the anchor hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached.



8 Be sure that the anchor is fully seated at the bottom of the hole and that excess mortar is visible at the top of the hole. If these requirements are not maintained, the application has to be renewed. For overhead application the anchor rod should be fixed (e.g. wedges).



9 Allow the adhesive to cure to the specified time prior to applying any load or torque. Do not move or load the anchor until it is fully cured (attend Table B3).



10 After full curing, the add-on part can be installed with the max. torque (Table B1) by using a calibrated torque wrench.

Table B3: Minimum curing time

Concrete temperature [°C]	Working time [min]	Minimum curing time [min]
+5 to +9	10	145
+10 to +14	8	85
+15 to +19	6	70
+20 to +29	4	50
+30 to +34	3	35
+35 to +39	3	20
Cartridge temperature	+5°C to +30°C	

SCELLEMENT UNIV MULTIMAT FIXH

Intended use

Installation instructions (continuation)

Curing time

Annex B 4

Table C1: Characteristic values of resistance for threaded rods under tension loads in uncracked concrete

Anchor size threaded rod				M8	M10	M12	M16	M20	M24
Steel failure									
Characteristic tension resistance		$N_{Rk,s}$	[kN]	$A_s \times f_{uk}$					
Combined pullout and concrete cone failure									
Temperature range T1: 40°C/24°C	dry and wet concrete	$\tau_{Rk,ucr}$	[N/mm ²]	8.0	7.0	7.0	7.0	7.0	6.0
	flooded bore hole	$\tau_{Rk,ucr}$	[N/mm ²]	8.0	7.0	7.0	7.0	7.0	6.0
Temperature range T2: 80°C/50°C	dry and wet concrete	$\tau_{Rk,ucr}$	[N/mm ²]	6.5	6.0	6.0	6.0	6.0	6.0
	flooded bore hole	$\tau_{Rk,ucr}$	[N/mm ²]	6.5	6.0	6.0	6.0	6.0	6.0
Increasing factor for concrete ψ_c		C25/30		1.04					
		C30/37		1.08					
		C35/45		1.13					
		C40/50		1.15					
		C45/55		1.17					
		C50/60		1.19					
Concrete cone failure									
Factor for concrete cone failure		$k_{ucr,N}$	[-]	11					
Edge distance		$c_{cr,N}$	[mm]	1.5 h_{ef}					
Axial distance		$s_{cr,N}$	[mm]	3.0 h_{ef}					
Splitting Failure									
Edge distance		$c_{cr,sp}$	[mm]	2.0 h_{ef}			1.5 h_{ef}		
Axial distance		$s_{cr,sp}$	[mm]	2 $c_{cr,sp}$					
Installation safety factor (dry and wet concrete)		γ_{inst}		1.0					
Installation safety factor (flooded bore hole)		γ_{inst}		1.2					

SCELLEMENT UNIV MULTIMAT FIXH

Performances

Characteristic values of resistance under tension loads in uncracked concrete

Annex C 1

Table C2: Characteristic values of resistance for threaded rods under shear loads in uncracked concrete

Anchor size threaded rod			M8	M10	M12	M16	M20	M24
Steel failure without lever arm								
Characteristic tension resistance	$V_{Rk,s}$	[kN]	$0.5 \times A_s \times f_{uk}$					
Ductility factor	k_7		0.8					
Steel failure with lever arm								
Characteristic bending moment	$M^0_{Rk,s}$	[Nm]	$1.2 \times W_{el} \times f_{uk}$					
Concrete pry-out failure								
Factor for resistance to pry-out failure	k_8	[-]	2.0					
Installation safety factor	γ_{inst}		1.0					
Concrete edge failure								
Effective length of anchor	l_f	[mm]	$l_f = \min(h_{ef}; 8 d_{nom})$					
Outside diameter of anchor	d_{nom}	[mm]	8	10	12	16	20	24
Installation safety factor	γ_{inst}		1.0					

SCELLEMENT UNIV MULTIMAT FIXH

Performances

Characteristic values of resistance under shear loads in uncracked concrete

Annex C 2

Table C3: Displacement under tension load¹⁾ (threaded rod)

Anchor size threaded rod			M8	M10	M12	M16	M20	M24
Uncracked concrete C20/25								
Tension load	F	[kN]	6.3	6.3	9.9	19.8	29.8	37.7
Displacement	δ_{N0}	[mm]	0.1	0.1	0.2	0.5	0.6	0.8
	$\delta_{N\infty}$	[mm]	0.4	0.4	0.4	0.4	0.4	0.4

Table C4: Displacement under shear load¹⁾ (threaded rod)

Anchor size threaded rod			M8	M10	M12	M16	M20	M24
Uncracked concrete C20/25								
Shear load	F	[kN]	5.2	8.3	12.0	22.4	35.0	50.4
Displacement	Δ_{V0}	[mm]	0.1	0.2	0.3	0.5	0.8	0.9
	$\Delta_{V\infty}$	[mm]	0.2	0.3	0.5	0.8	1.2	1.4

SCELLEMENT UNIV MULTIMAT FIXH**Performances**
Displacement**Annex C 3**